

FIG. 1

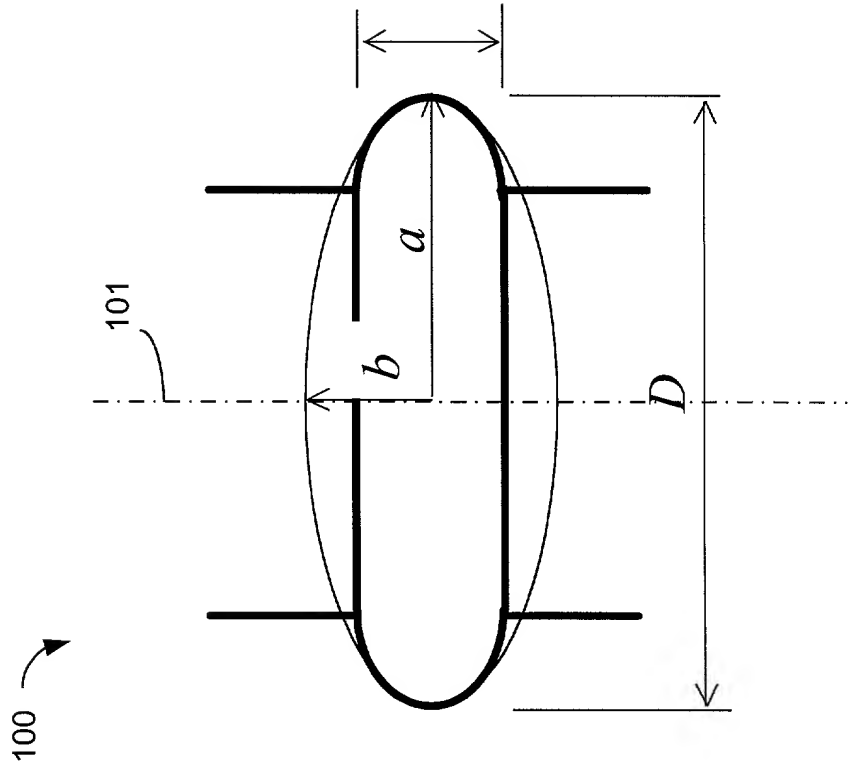


FIG. 2A




FIG. 2B




FIG. 2C

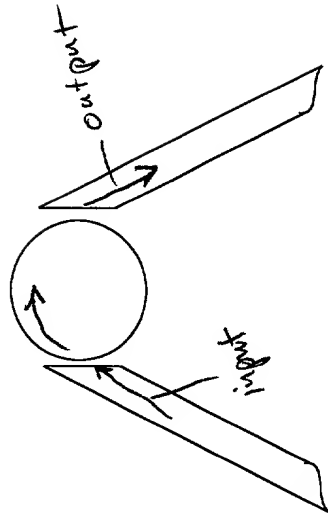


FIG. 3

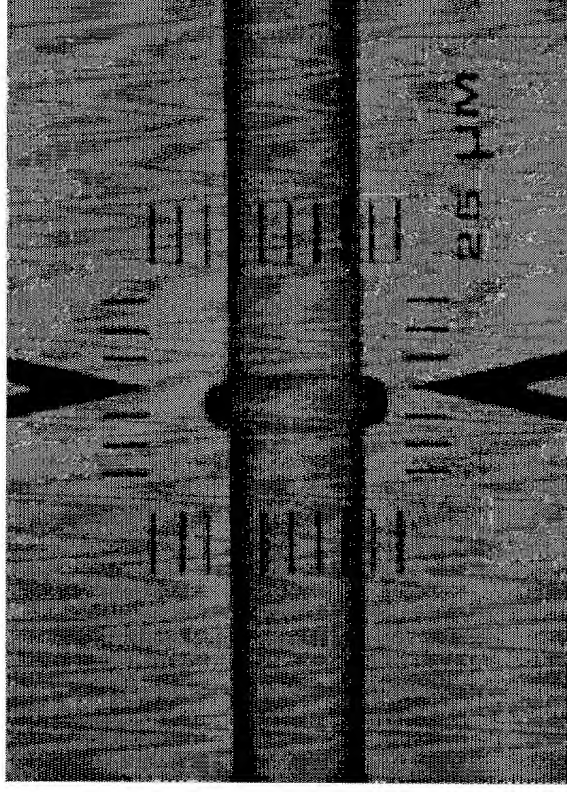


FIG. 4

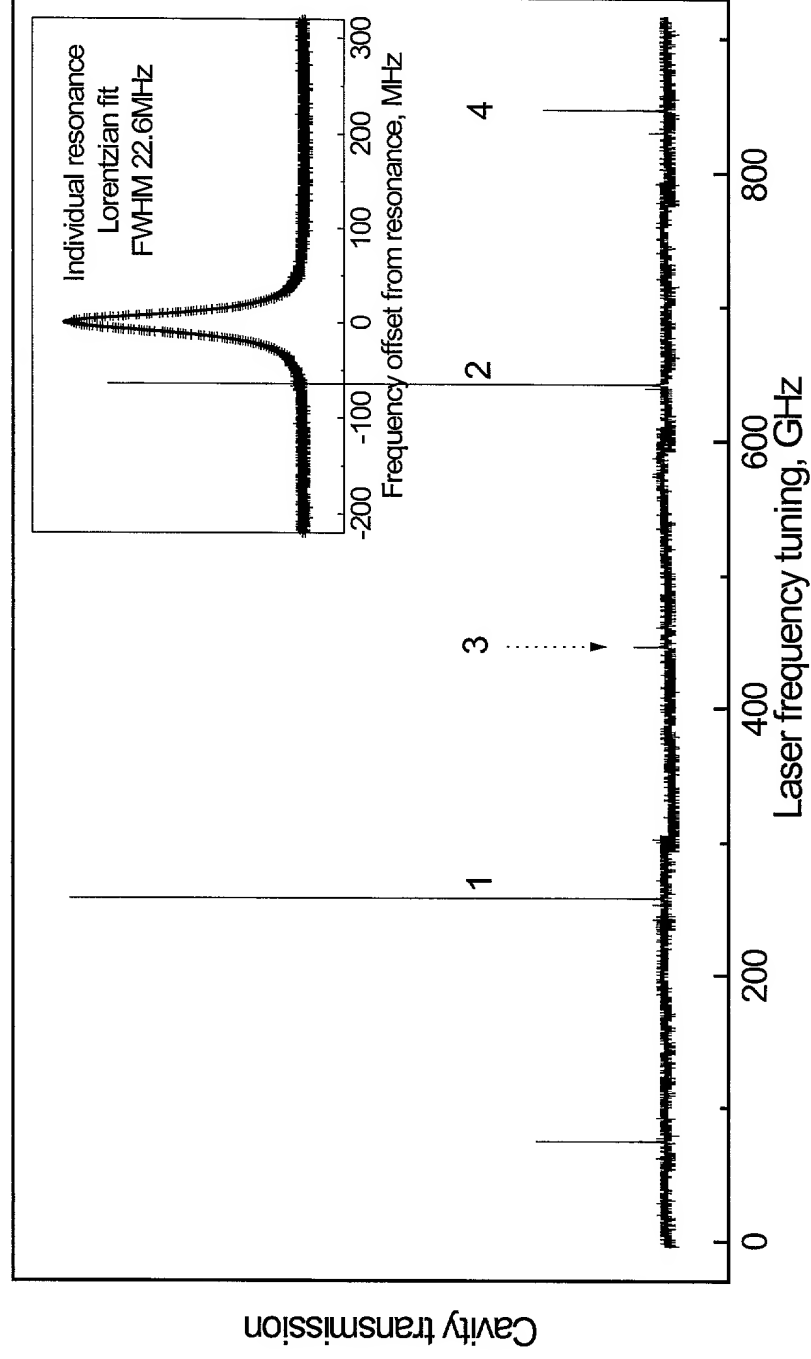


FIG. 5A


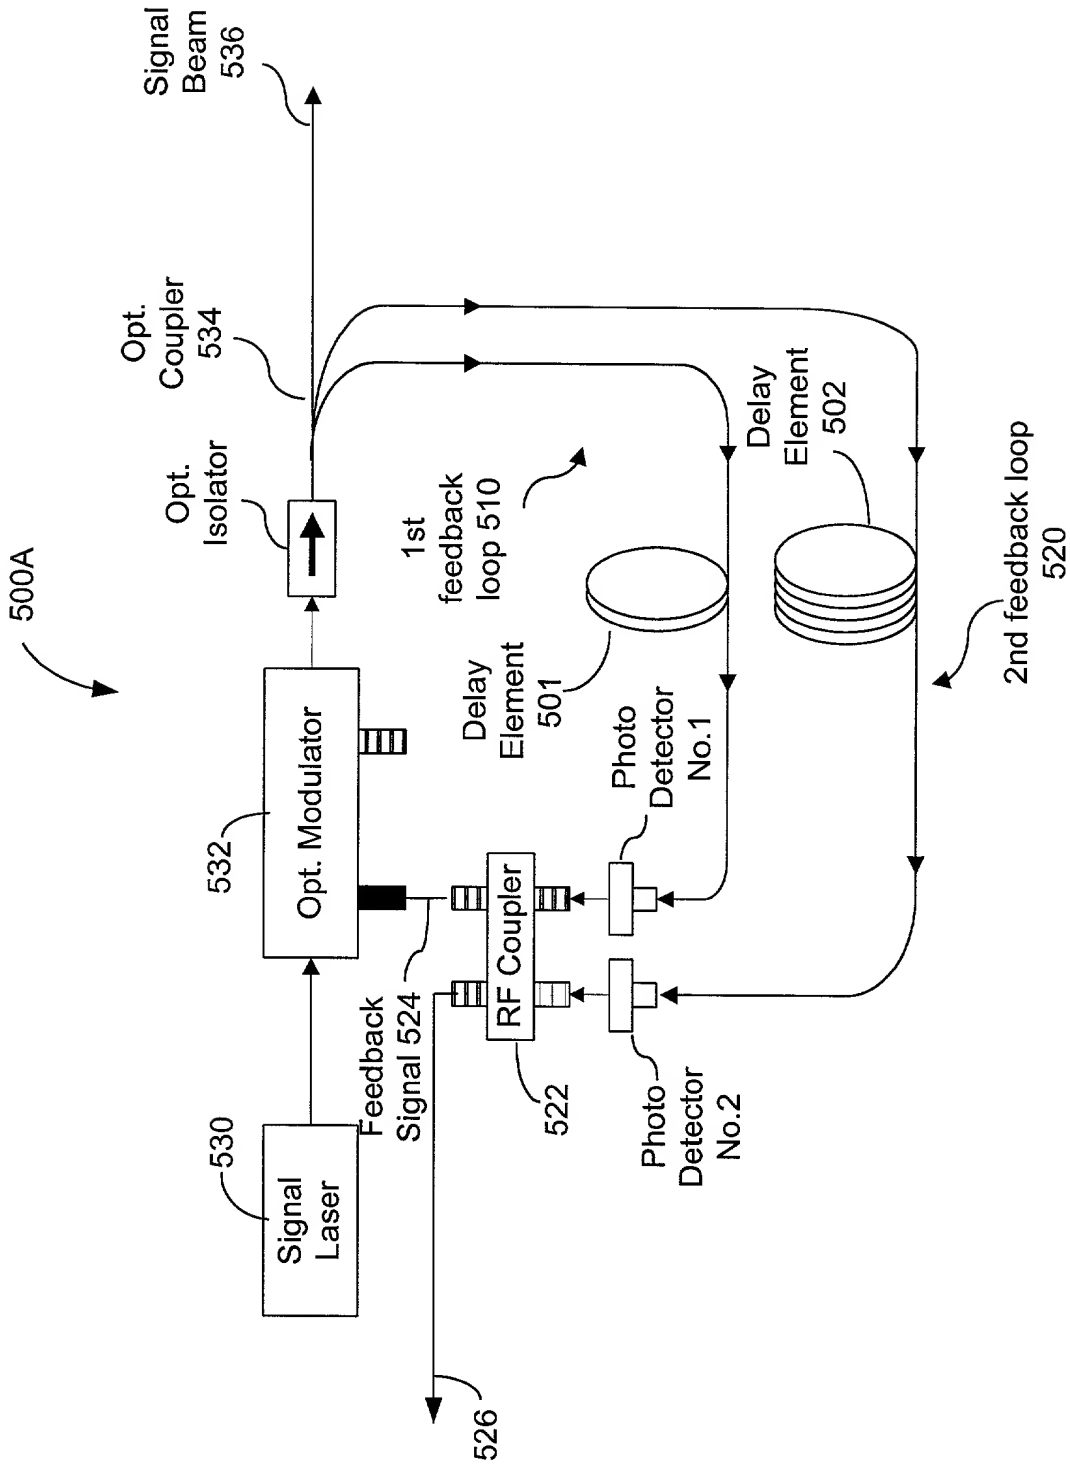


FIG. 5B

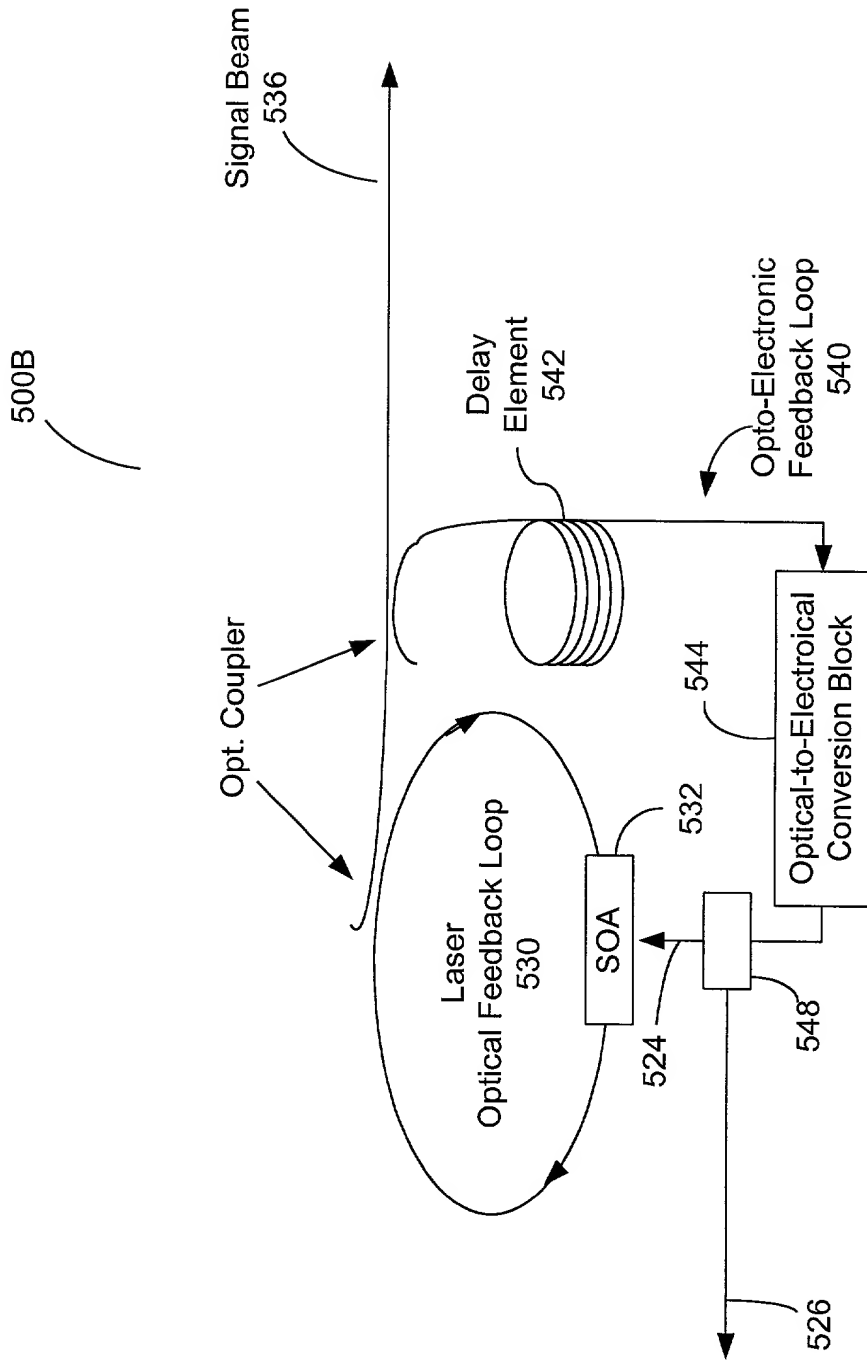

500C




FIG. 6A

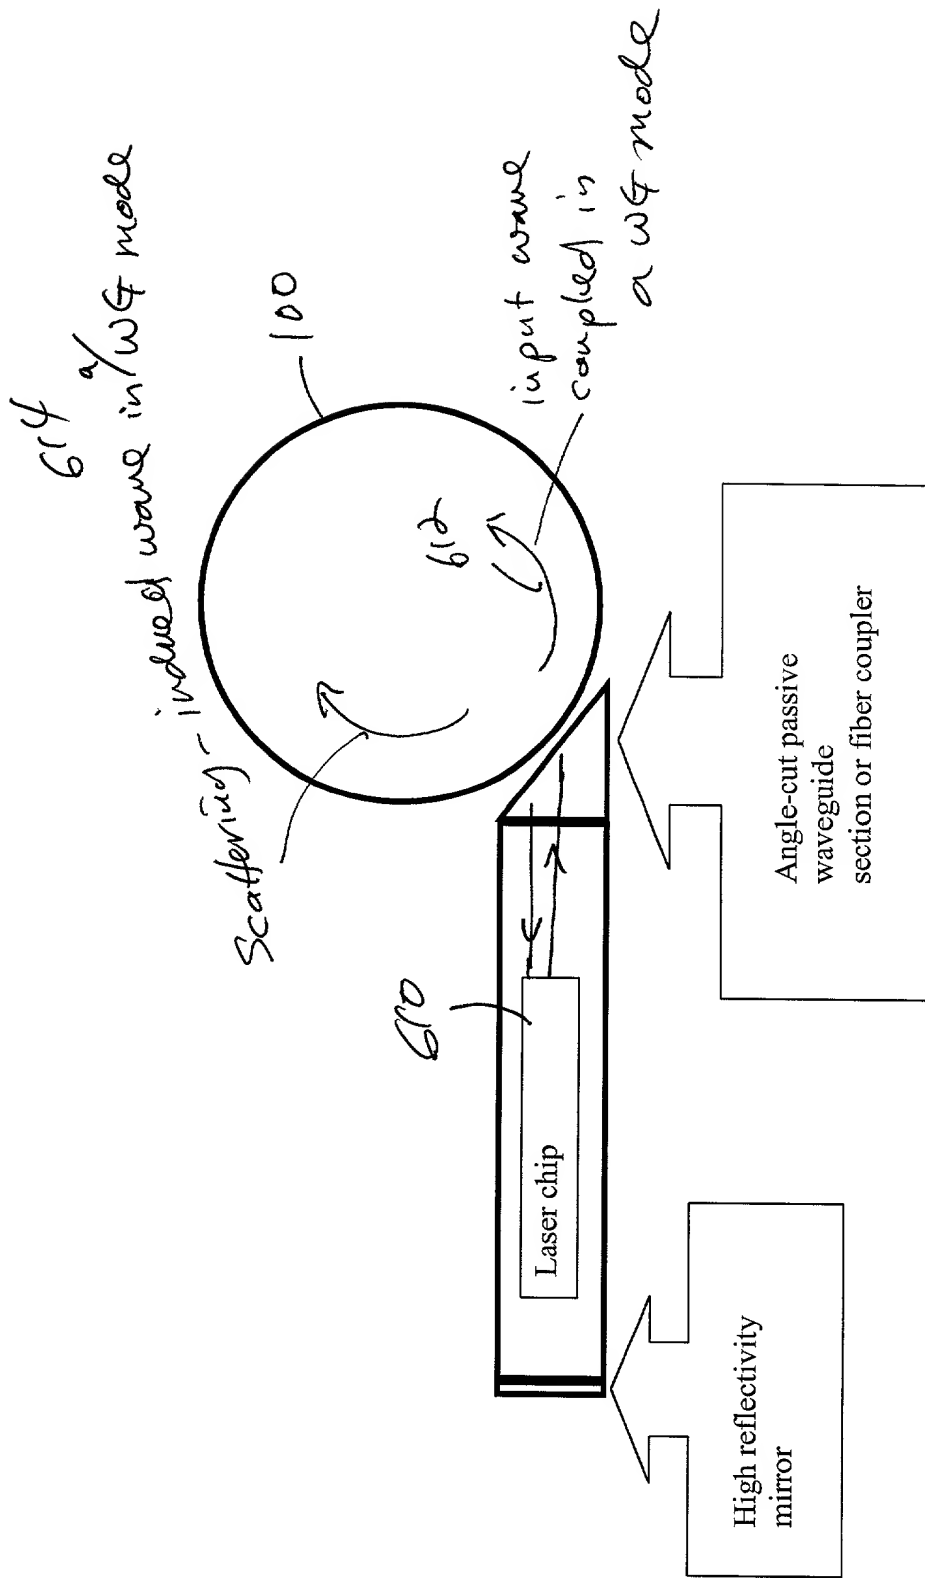


FIG. 6B

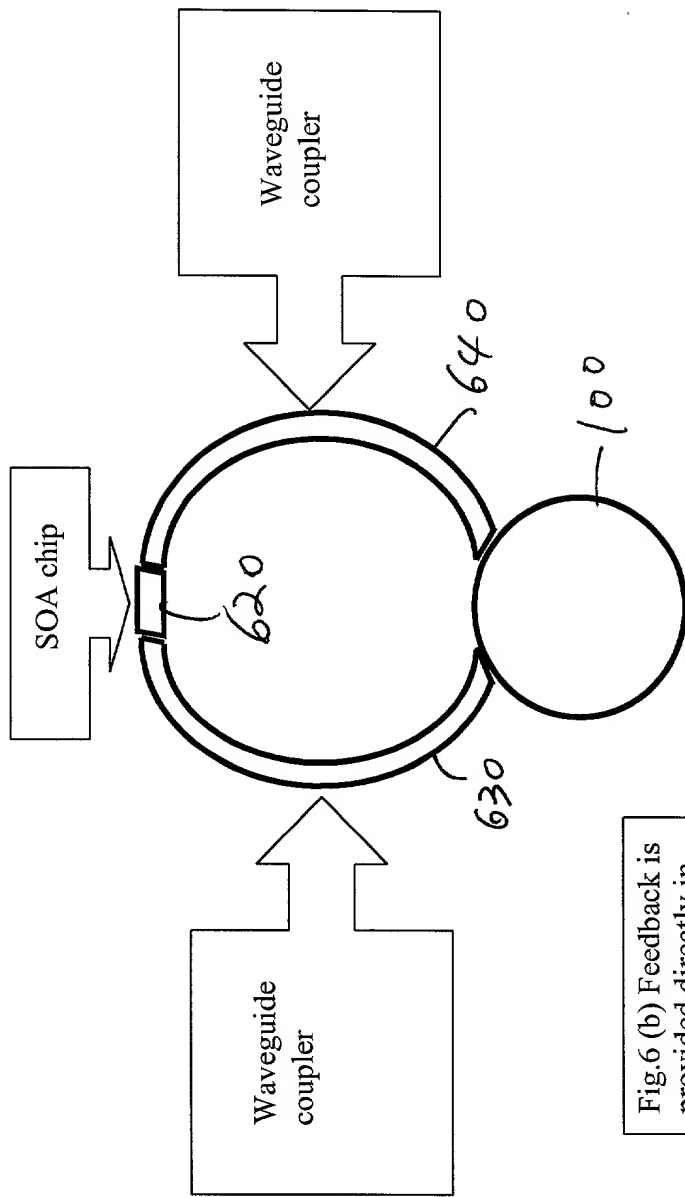


Fig.6 (b) Feedback is provided directly in the closed loop, by the second evanescent optical coupler and waveguide